

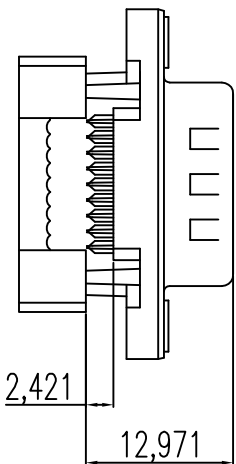

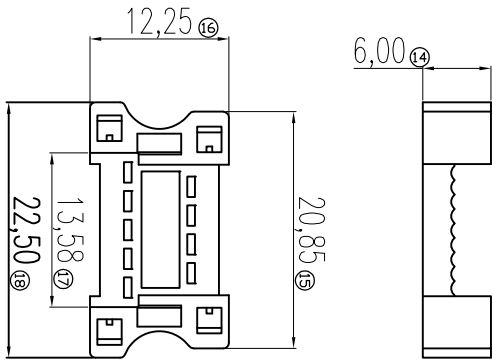

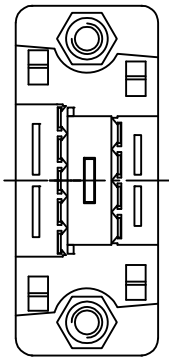


# GP Component

REV.	ECN NO.	LOCATIONS	DESCRIPTION	DATE	DESIGN
A0			Initial	2012/11/19	Jamie Zie
A1				2012/12/10	Jamie Zie

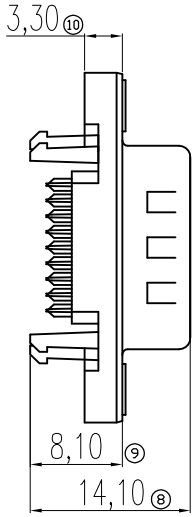

- 备注:
- 性能:
    - 额定电压: 250V
    - 额定电流: 1AMP
    - 接触阻抗: 30mΩ MAX.
    - 绝缘阻抗: 1000MΩ MIN.at 500V DC
    - 耐电压: 500V Per minute
    - 温度范围: -55° C~105° C
  - 材质:
    - 胶芯+盖子: PBT+30% G.F (UL94V-0) 蓝色
    - 端子: BRASS, 镀铜底50u" Min. 接触部镀金6/F
    - 铁壳: SPCC, 前壳镀铜底50u"Min, 表面镀镍50u"Min.

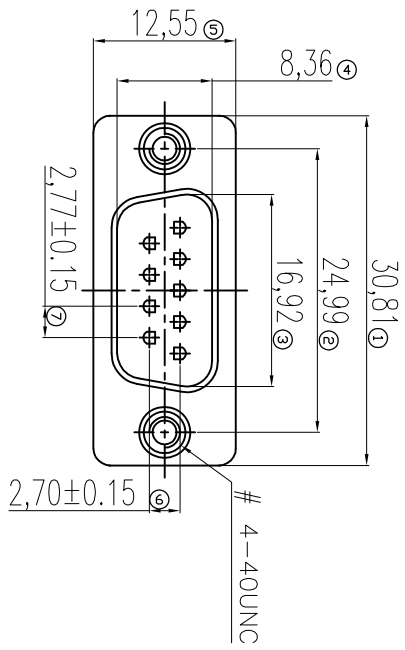

Matrix Electronics Co.,Ltd

NO	VARIETY	QTY	MATERIAL	REMARK
<p><b>TOLERANCE:</b></p> <p>XX ±0.30</p> <p>XXX ±0.25</p> <p>XXXX ±0.15</p> <p>ANGLE: ±3'</p>				
<b>DESIGN BY :</b>		<b>DATE :</b>		<b>PART NAME:</b> DB 9V Pressure row Two-piece, To be deducted
Jamie Zie		2012/12/20		
<b>CHECKED BY:</b>		<b>DATE :</b>		<b>PART NO.</b> MDS09-01-02
Vilen Lee		2012/12/20		<b>MOLD NO.</b> NA
<b>APPROVED BY1:</b>		<b>DATE :</b>		<b>DRAW NO.</b>
Richard Hsieh		2012/12/20		<b>SHEET NO.</b> 1 OF 1
<b>APPROVED BY2:</b>		<b>DATE :</b>		
Richard Hsieh		2012/12/20		
<b>UNIT:</b> mm [inch]	<b>SCALE:</b> 1:1	<b>SIZE:</b> A4		