


GP Component





REV.	ECN NO.	LOCATIONS	DESCRIPTION	DATE	DESIGN
A0			Initial	2013/08/20	Jamie Zie

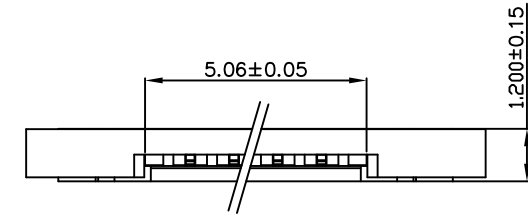


NOTE:
 1.MATERIAL:
 HOUSING:NYLON UL 94V-0
 CONTACT:PHOSPHOR BRONZE
 PLATING:TIN
 TEMPERATURE:-20°C+85°C
 2.SPECIFICATION:
 SIZE:2 TO 24 CIRCUITS
 VOLTAGE:50V MAX
 CURRENT:0.5A MAX
 CONTACT RESISTANCE:20m MAX.
 DIELECTRIC WITHSTANDING

MATRIX PART NO:


M F C - 10 - 04 P 32 RS
 Matrix FPC
 pitch
 25:2.54mm
 12:1.25mm
 10:1.0mm
 05:0.5mm
 03:0.3mm
 RS : ROHS
 HF : Halogen Free
 Series Number
 T:雙觸式
 C:掀蓋式
 P:壓桿式

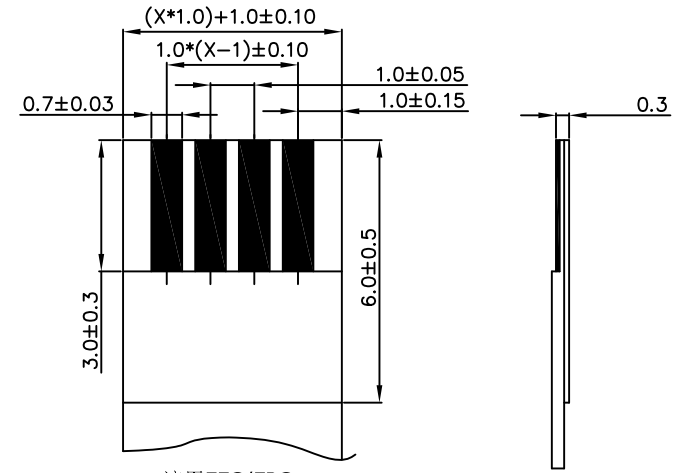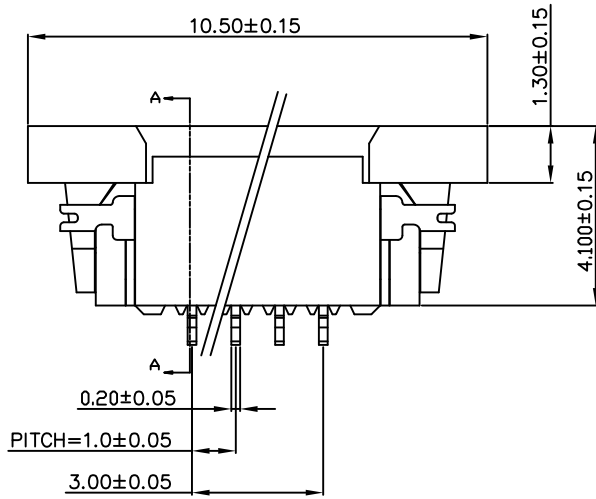

適用FFC/FPC
 APPLICABLE FFC/FPC

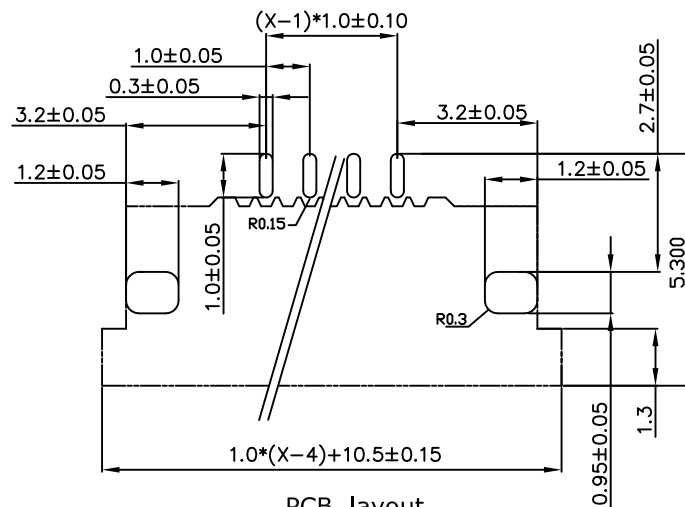

PCB layout

NO	VARIETY	QTY	MATERIAL	REMARK
 Matrix Electronics Co.,Ltd				
TOLERANCE: X.X ±0.38 X.XX ±0.25 X.XXX ±0.13 ANGLE: ±3°		DESIGN BY : Jamie Zie	DATE : 2013/08/20	PART NAME: P=1.0mm H=1.2mm FPC CONNECTOR Upper contact
		CHECKED BY: Vicky Hsieh	DATE : 2013/08/20	PART NO. MFC-10-04P32RS
		APPROVED BY1: Richard Hsieh	DATE : 2013/08/20	MOLD NO. NA
		APPROVED BY2: Richard Hsieh	DATE : 2013/08/20	DRAW NO. SHEET NO. 1 OF 1