

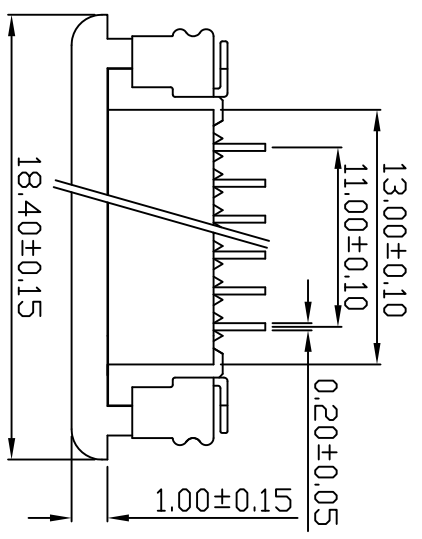
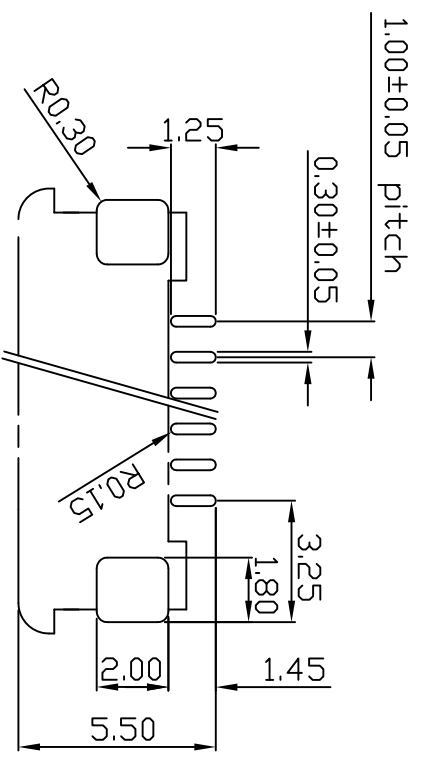
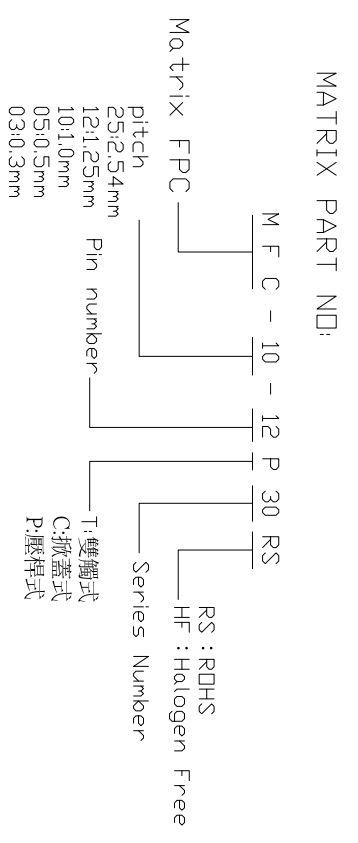
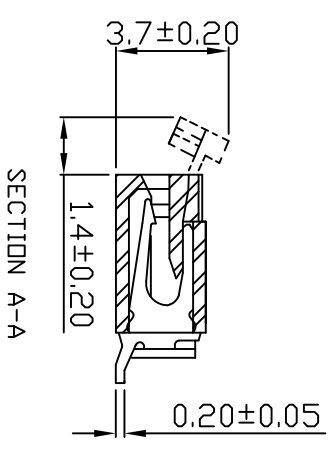


GP Component


REV.	ECN NO.	LOCATIONS	DESCRIPTION	DATE	DESIGN
A0			Initial	2013/08/01	Jamie Zie

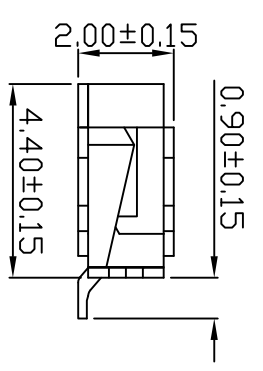

NOTE:
 1. MATERIAL:
 HOUSING: NYLON46 UL 94V-0
 CONTACT: BRASS
 PLATING: TIN
 TEMPERATURE: -20°C+85°C
 2. SPECIFICATION:
 SIZE: 2 TO 30 CIRCUITS
 VOLTAGE: 50V
 CURRENT: 0.5A
 CONTACT RESISTANCE: 20m ΩMAX.
 DIELECTRIC WITHSTANDING VOLTAGE: 250V AC.

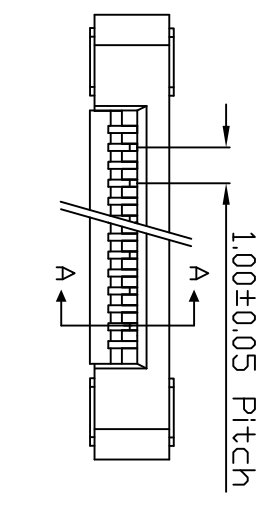

PCB layout

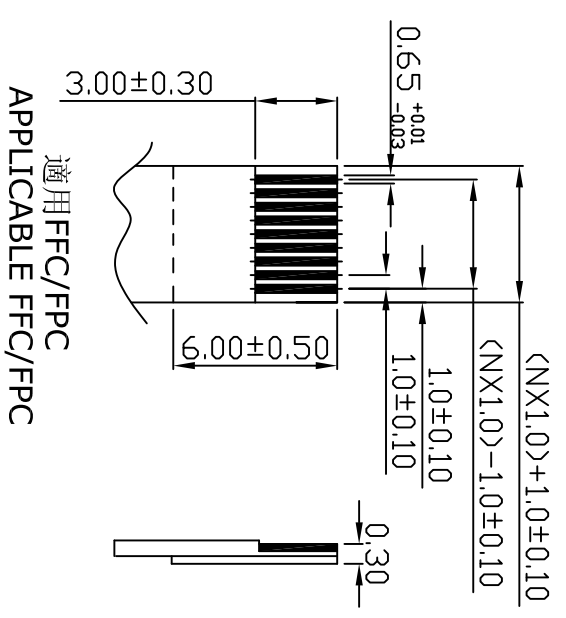

NO	VARIETY	QTY	MATERIAL	REMARK
			Matrix Electronics Co., Ltd	

TOLERANCE: X: ±0.30 X: ±0.20 X: ±0.10 X: ±0.05 X: ±2°	DESIGN BY: Jamie Zie	DATE: 2013/08/01	PART NAME: P=1.0mm, H=2.0mm FPC CONNECTOR Next contact
UNIT: mm [inch]	CHECKED BY: Vicki Hsieh	DATE: 2013/08/01	MOLD NO. MFC-10-12P30RS
SCALE: 1:1	APPROVED BY1: Richard Hsieh	DATE: 2013/08/01	DRAW NO. N / A
SIZE: A4	APPROVED BY2: Richard Hsieh	DATE: 2013/08/01	SHEET NO. 1 OF 1